

Magnetic Sensor IC

## Dual Outputs for both S and N-pole Low Power Hall-Effect Sensor IC



### AS1829A

#### ● General Description

Using low power CMOS process, the AS1829A is designed for low power, high performance unipolar detection dual output hall-effect application, such as cover switch, contactless switch, solid state switch and lid close sensor etc battery operation. The hall IC integrated an on-chip hall voltage generator for magnetic sensing, a comparator that amplifies the hall voltage, a chopper amplifier, a Schmitt trigger to provide switching hysteresis for noise rejection, and two complementary output.

The total power consumption of AS1829A is typically less than 3.0uA at 3.6V power supply. AS1829A is designed to respond to alternating North and South poles. While the magnetic flux density (B) is larger than operate point (B<sub>OP</sub>), the output will be turned on (low), the output is held until the magnetic flux density (B) is lower than release point (B<sub>RP</sub>), then turn off (high).

The device is available in DFN1014-4L Package and is rated over the -40°C to 125°C. The all packages are RoHS and Green compliant.

#### ● Features

- Input Voltage Range :2.2V to 5.0V
- Micro-power consumption ideal for battery power applications
- Unipolar Operation, dual output
- Very high sensitivity hall sensor
- Low Power CMOS process technology
- Chopper stabilization amplifier stage
- Magnetic Sensitivity (typical)  
B<sub>OPS</sub>=33Gauss, B<sub>RPS</sub>=20Gauss  
B<sub>OPN</sub>= -33Gauss, B<sub>RPN</sub>= -20Gauss
- Good RF noise immunity
- No need pull-up resistor
- Small Solution Size
- RoHS & Green Compliant
- DFN1014-4L Packages
- -40°C to +125 °C Temperature Range

#### ● Applications

- Cover switch in clam-shell cellular phones
- Cover switch in Notebook, PC/PAD
- Contact-less switch in consumer products
- Solid State Switch
- Handheld Wireless Handset Awake Switch
- Lid close sensor for battery-powered devise
- Magnet proximity sensor for reed switch replacement in low duty cycle applications
- DV, DSC, and White Goods


#### ■ Ordering Information



Part Number	B <sub>OP</sub> (Gauss)	B <sub>RP</sub> Gauss)	Package Type	Package Qty	Temperature	Eco Plan
AS1829ADRN	±33Gauss	±20Gauss	DFN1014-4L	7-in reel 3000pcs/reel	-40~85°C	Green
AS1829ADRY	±33Gauss	±20Gauss	DFN1014-4L	7-in reel 3000pcs/reel	-40~125°C	Green

■ **Marking & Pin Assignment**

DFN1014-4L

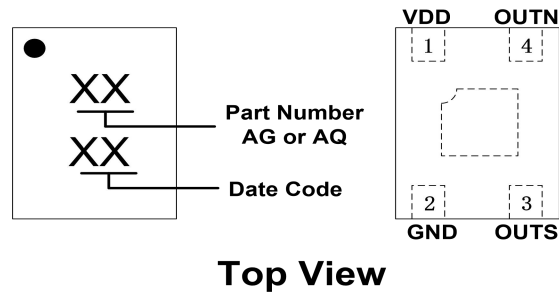

Pin Name	Pin No.	I/O	Pin Function
	DFN1014-4L		
VDD	1	P	Input Power Supply.
GND	2	P	Ground.
OUTS	3	O	Output Pin for South Pole.
OUTN	4	O	Output Pin for North Pole.

■ **Typical Application Circuit**

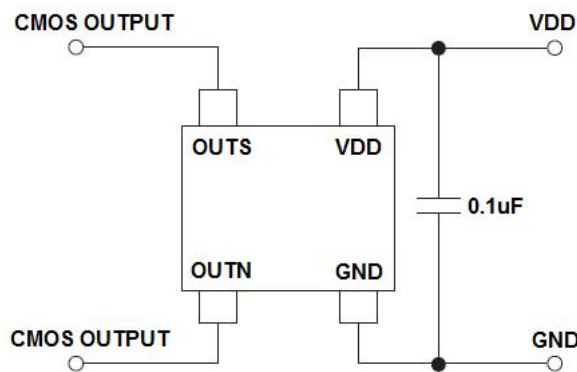


Figure 1, Typical Application Circuit of AS1829A

■ **Block Diagram**



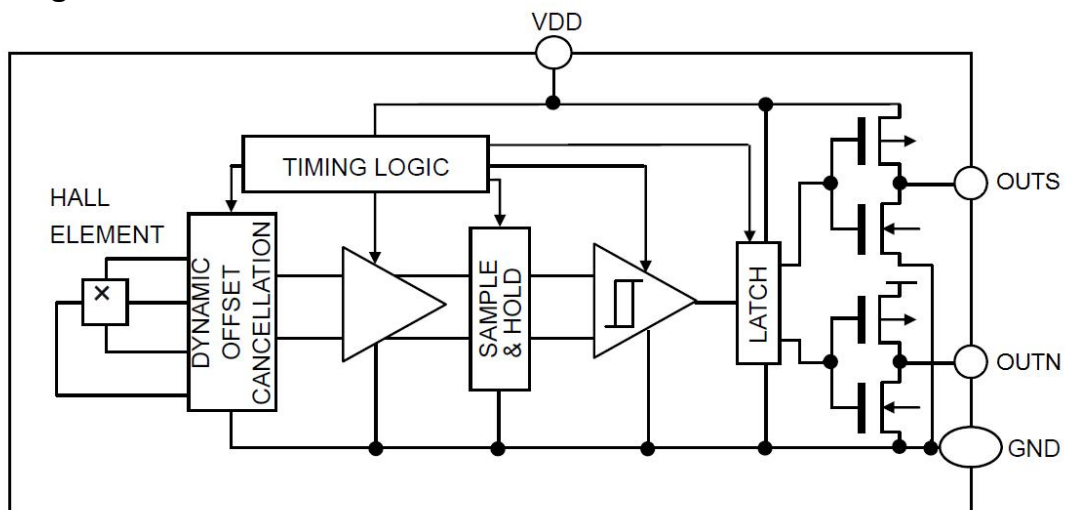


Figure 2, Block Diagram of AS1829A

■ **Tape and Reel Information**

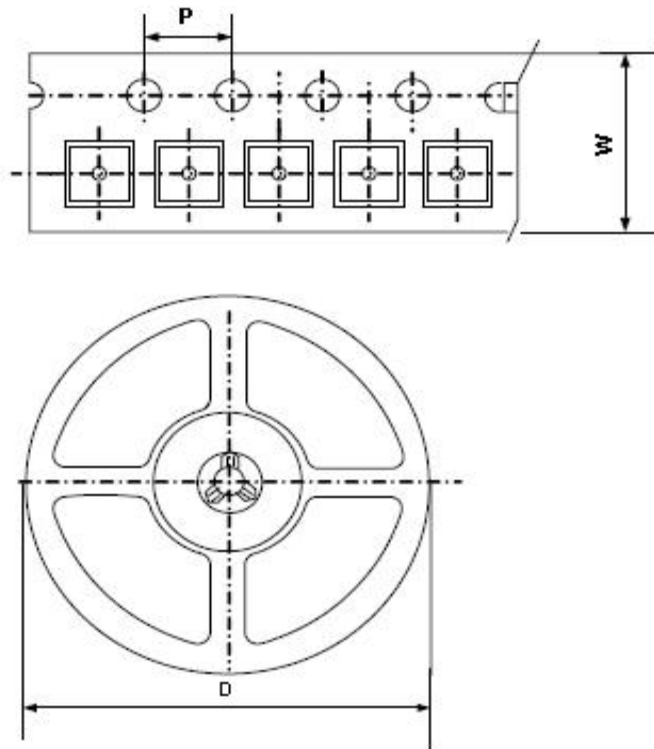

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**

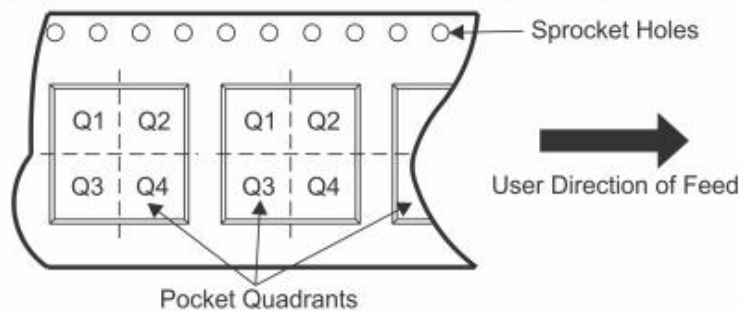

Device	Package Type	SPQ	Carrier Width (W)	Pitch(P)	Reel Size(D)	Pin1 Quadrant
AS1829ADRN	DFN1014-4L	3000pcs	8.0±0.1 mm	4.0±0.1 mm	180±1 mm	Q2
AS1829ADRY	DFN1014-4L	3000pcs	8.0±0.1 mm	4.0±0.1 mm	180±1 mm	Q2

\*All dimensions are nominal